



????????? ,mark ?????

ATOM ?CULV ??????. ???Atom cpu All in one ?? ?????



???? ?? .E2180(2.0 FSB800?L2-1MB?P-Dual Core)?G31

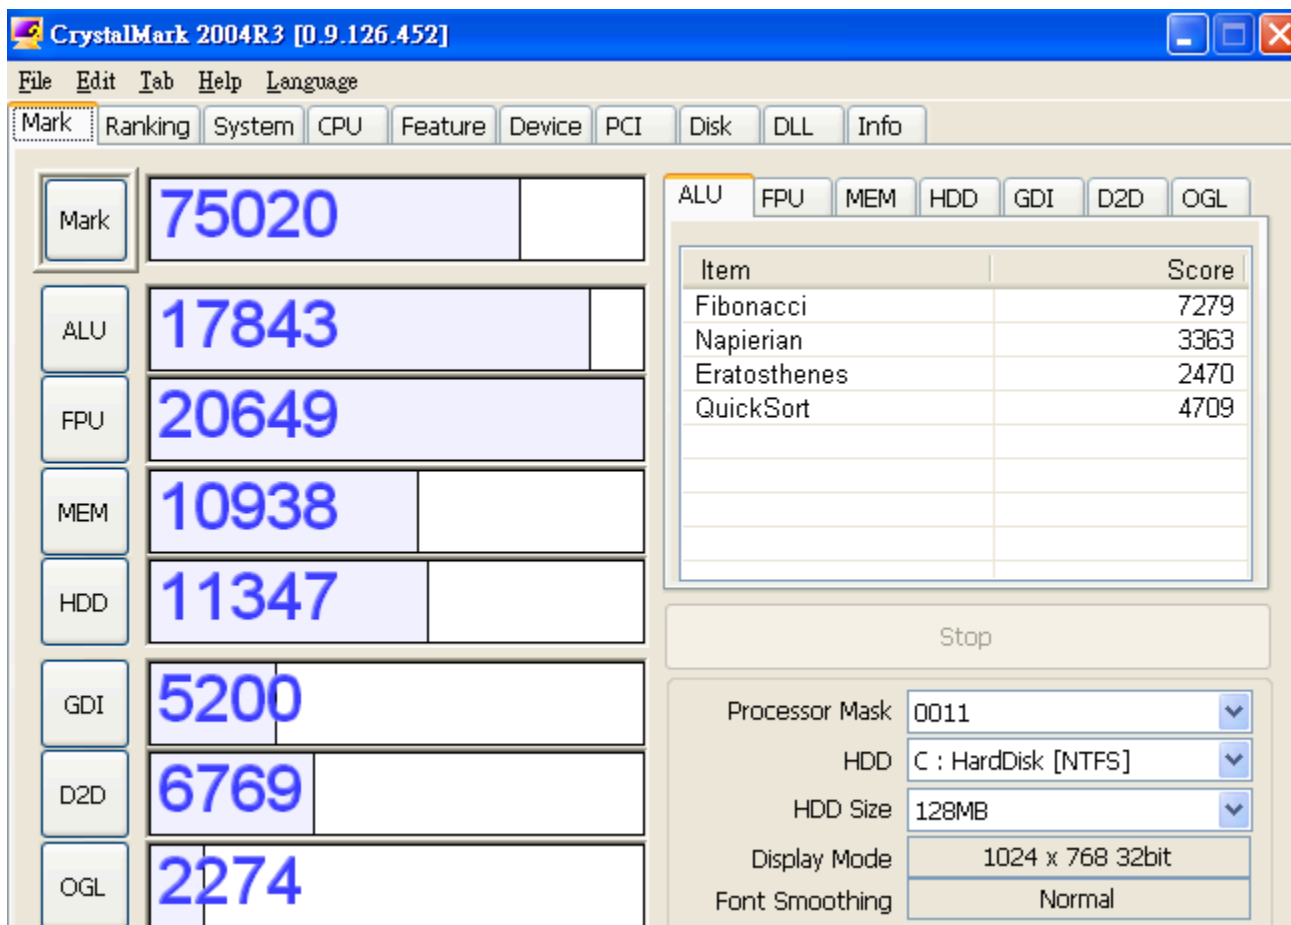

CrystalMark 2004R3 [0.9.126.452]

File Edit Tab Help Language

Mark Ranking System CPU Feature Device PCI Disk DLL Info

Mark	75020
ALU	17843
FPU	20649
MEM	10938
HDD	11347
GDI	5200
D2D	6769
OGL	2274

Item	Score
Fibonacci	7279
Napierian	3363
Eratosthenes	2470
QuickSort	4709

Stop

Processor Mask: 0011

HDD: C : HardDisk [NTFS]

HDD Size: 128MB

Display Mode: 1024 x 768 32bit

Font Smoothing: Normal



U7600(1.2G?FBS533?L2-2M?C2D-M) in Panasonic

CrystalMark 2004R2 [0.9.123.404]

File Edit Tab Help Language

Mark Ranking System CPU Feature Device PCI Disk DLL Info Back

Mark	45445
ALU	10590
FPU	12299
MEM	7135
HDD	10791
GDI	1409
D2D	2407
OGL	814

ALU FPU MEM HDD GDI D2D OGL

Item	Score
Fibonacci	4410
Napierian	1965
Eratosthenes	1440
QuickSort	2753

Stop

Processor Mask 0011

HDD C : HardDisk [NTFS]

HDD Size 128MB

Display Mode 1024 x 768 32bit

Font Smoothing Normal

?? <http://www.pczone.com.tw/vbb3/thread/52/148528/> windwithme ??

IBM X200S CULV Celeron M ULV 1.2G L2 1MB

The image shows two software windows. The main window is CrystalMark 2004R3 [0.9.126.452], which displays benchmark results for various system components. The 'Mark' tab is selected, showing a total score of 19265. Other components and their scores are: ALU (3430), FPU (1911), MEM (2048), HDD (7821), GDI (1166), D2D (2611), and OGL (278). A table under the 'ALU' tab lists specific benchmarks: Fibonacci (2279), Napierian (473), Eratosthenes (219), and QuickSort (437). The 'CPU-Z' window is overlaid on the bottom right, providing detailed information about the processor. It identifies the CPU as an Intel Pentium SU9300 (Penryn) on a Socket P (478) package, manufactured with 45 nm technology. The specification is Intel(R) Celeron(R) M CPU 723 @ 1.20GHz, with a family of 6, model of 7, and stepping of 6. The clock speed is 1197.0 MHz, with a multiplier of x 6.0. The bus speed is 199.5 MHz and the rated FSB is 798.0 MHz. The cache configuration includes 32 KBytes of L1 Data and L1 Inst. cache, and 1024 KBytes of Level 2 cache. The CPU-Z window also shows 1 core and 1 thread selected.

Item	Score
Fibonacci	2279
Napierian	473
Eratosthenes	219
QuickSort	437

Component	Score
Mark	19265
ALU	3430
FPU	1911
MEM	2048
HDD	7821
GDI	1166
D2D	2611
OGL	278

Processor	Value
Name	Intel Pentium SU9300
Code Name	Penryn
Package	Socket P (478)
Technology	45 nm
Specification	Intel(R) Celeron(R) M CPU 723 @ 1.20GHz
Family	6
Model	7
Stepping	6
Ext. Family	6
Ext. Model	17
Instructions	MMX, SSE, SSE2, SSE3, SSSE3, EM64T

Clocks (Core #0)	Cache
Core Speed	L1 Data
Multiplier	L1 Inst.
Bus Speed	Level 2
Rated FSB	Level 3

Dell E4200 SU9400

The screenshot shows the CrystalMark 2004R3 [0.9.126.452] application window. The main window title is "CrystalMark 2004R3 [0.9.126.452]". The menu bar includes "File", "Edit", "Tab", "Help", and "Language". The main menu includes "Mark", "Ranking", "System", "CPU", "Feature", "Device", "PCI", "Disk", "DLL", and "Info".

The "Mark" tab is selected, showing the following scores:

Mark	60920
ALU	13884
FPU	14352
MEM	10160
HDD	15526
GDI	3684
D2D	2071
OGL	1243

The "ALU" sub-tab is selected, showing a table of scores for various benchmarks:

Item	Score
Fibonacci	5121
Napierian	3647
Eratosthenes	1714
QuickSort	3380

Below the table is a "Stop" button. At the bottom, there are configuration options:

- Processor Mask: 0011
- HDD: C : HardDisk [NTFS]
- HDD Size: 128MB
- Display Mode: 1280 x 800 32bit
- Font Smoothing: Normal

E5300 (2.66G?FBS800?L2-2M?P-Dual Core) in Dell vostro 320

The screenshot shows the CrystalMark 2004R3 [0.9.126.452] application window. The interface includes a menu bar (File, Edit, Tab, Help, Language) and a toolbar with tabs for Mark, Ranking, System, CPU, Feature, Device, PCI, Disk, DLL, and Info. The 'Mark' tab is active, displaying a grid of benchmark scores for different components: Mark (87118), ALU (25687), FPU (26800), MEM (12713), HDD (9097), GDI (6127), D2D (4517), and OGL (2177). To the right, there is a sub-tabbed interface for the ALU component, with a table showing scores for Fibonacci (9258), Napierian (6844), Eratosthenes (3214), and QuickSort (6349). Below the table is a 'Stop' button and a configuration section with dropdown menus for Processor Mask (0011), HDD (C : HardDisk [NTFS]), HDD Size (128MB), Display Mode (1366 x 768 32bit), and Font Smoothing (Normal).

Item	Score
Fibonacci	9258
Napierian	6844
Eratosthenes	3214
QuickSort	6349

Processor Mask: 0011  
HDD: C : HardDisk [NTFS]  
HDD Size: 128MB  
Display Mode: 1366 x 768 32bit  
Font Smoothing: Normal



N270(1.6G?FBS533?L2-512K?Atom)on ASUS

EEPC 901

??????<http://www.tonywu.idv.tw/blog/?p=54>