



?????http://buy.yahoo.com.tw/gdsale/gdsal...c0547de27c5982

?? firmware ??

<http://support.asus.com/download/dow...Language=zh-tw>

????? > ????

????? > VoIP

????? > AX-112

??"??"

firmware ?? AX112\_2\_16.zip

????????????

????

1. ?????????????? SIP ??????????????
2. ?? Web UI ??? ASUS ?????? firmware ??
3. ??????
4. ????? WAN ? LAN ??????(????????????????????)???? WAN ???? DHCP ?????? AX-112 ? WAN ?? IP???? LAN port??? IP????????? DHCP server????????????????? AX-112 ? LAN ?? IP ???? LAN ???

?? AX-112 ? IP?

????????? AX-112 ? ?????? ?????????????? 100??

5. ?????????? IP ??


??????



### 硬體連接安裝示範 B

(有裝IP分享器的連接方式)

www.gogotalk.net.tw

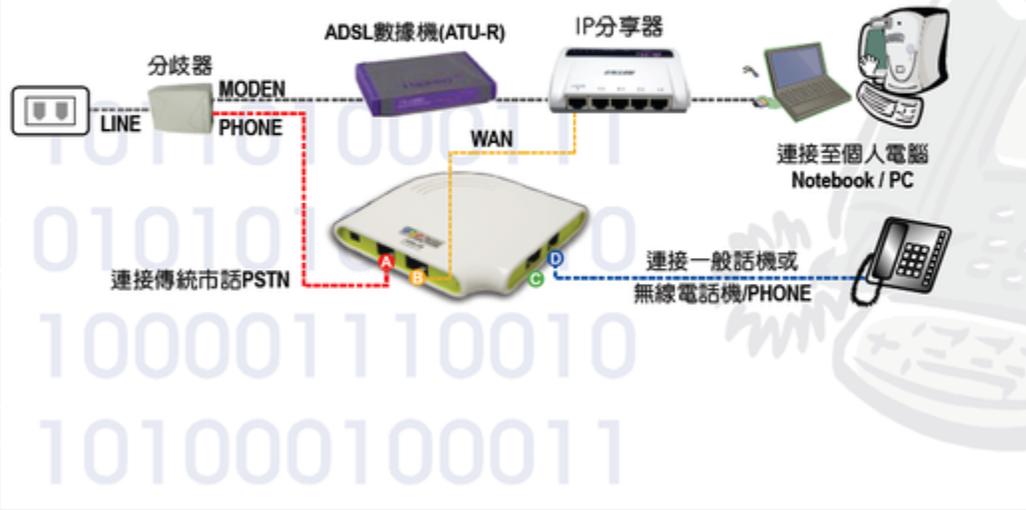




??????

Advanced



SIP

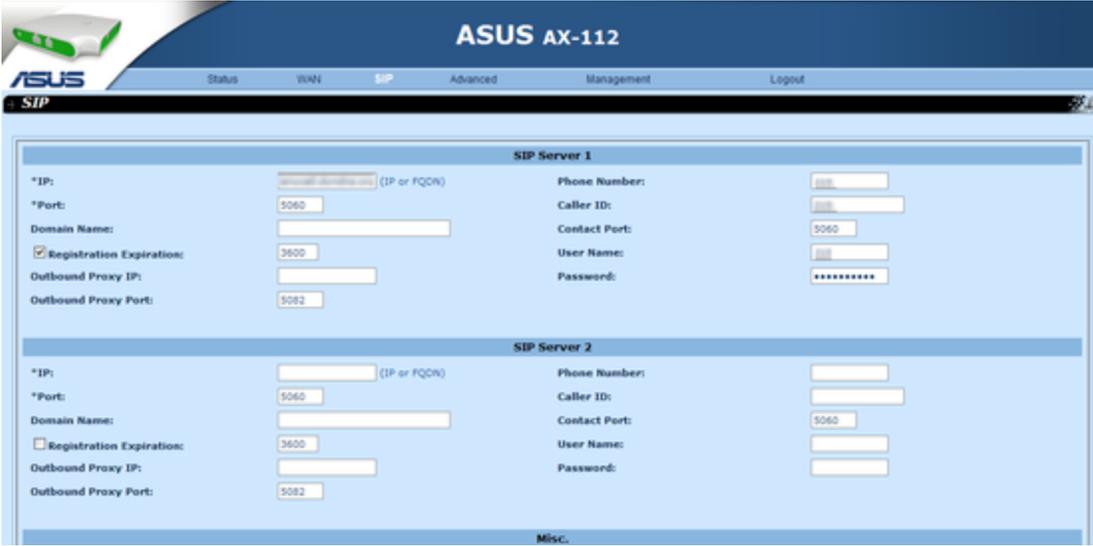

The image shows the web-based configuration interface for the ASUS AX-112 SIP phone. The interface is titled "ASUS AX-112" and has a navigation menu with "SIP" selected. Below the menu, there are two sections for configuring SIP servers. The first section, "SIP Server 1", has the following fields: \*IP: (with a dropdown for "Automatic Discovery"), \*Port: 5060, Domain Name: (empty),  Registration Expiration: 3600, Outbound Proxy IP: (empty), Outbound Proxy Port: 5082, Phone Number: (empty), Caller ID: (empty), Contact Port: 5060, User Name: (empty), and Password: (masked with asterisks). The second section, "SIP Server 2", has the following fields: \*IP: (empty), \*Port: 5060, Domain Name: (empty),  Registration Expiration: 3600, Outbound Proxy IP: (empty), Outbound Proxy Port: 5082, Phone Number: (empty), Caller ID: (empty), Contact Port: 5060, User Name: (empty), and Password: (empty). At the bottom of the interface, there is a "Misc." section.