



???? SIP Provider/VoIP Gateway?? Trunk ?????????????????? Trunk ?? [Web-UI: ?](#)  
[?????](#)

**Pennytel** ..... 2

**Chief070 - ????** ..... 2

**Dell Voice** ..... 3

**IPBB - ????** ..... 4

**Q & A** ..... 4

## Pennytel

- FromUser: <SIP Number> ????????????????

Provider Name ⓘ: pennytel

Hostname ⓘ: sip.pennytel.com

Username ⓘ: 8883963939

Password: [masked]

Codecs: First: u-law [v] Second: a-law [v] Third: None [v]  
Fourth: None [v] Fifth: None [v]

CallerID ⓘ: [ ]

FromDomain: [ ]

FromUser: [ ]

AuthUser: [ ]

insecure: very [v]

Outbound Proxy: [ ]

Enable Remote MWI:

## Chief070 - ????

### Trunks

- Password: ?????? SIP ??
- Codec: ?????? g729 codec????? u-law ???
- Outbound Proxy: 202.133.231.17 (??????? IP)


?? sip.conf

Web-UI > File Editor (Advanced Mode) > sip.conf > Add Context > Add New Context: chief-did

```
host=202.133.231.17
type=peer
context=DID_trunk_3
```

NOTE:

DID\_trunk\_# ??? # ??? Trunks ??????????????(???)?

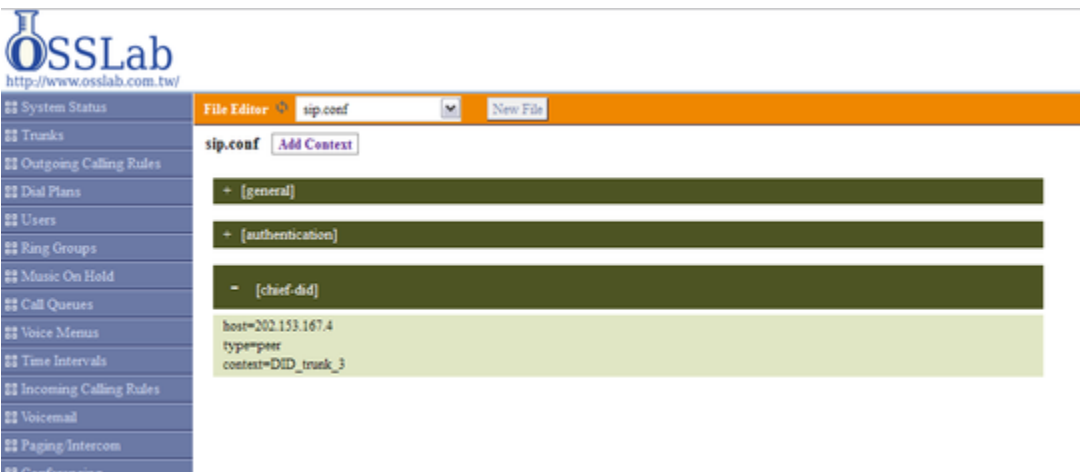

Dell Voice

?? SIP Unlock key?

password: ????????????

Edit SIP trunk trunk\_1 X

Provider Name ⓘ:

Hostname ⓘ:

Username ⓘ:

Password:

Codecs: First:  Second:  Third:

Fourth:  Fifth:

CallerID ⓘ:

FromDomain:

FromUser:

AuthUser:

insecure:

Outbound Proxy:

Enable Remote MWI:

IPBB - ????

- Username: <070??>
- Password: <SIP ??>
- FromUser: <070??>

Edit SIP trunk trunk\_3 X

Provider Name ⓘ:

Hostname ⓘ:

Username ⓘ:

Password:

Codecs: First:  Second:  Third:

Fourth:  Fifth:

CallerID ⓘ:

FromDomain:

FromUser:

AuthUser:

insecure:

Outbound Proxy:

Enable Remote MWI:

**Q & A**

Q: [??] ??/????????????????

WARNING[428] chan\_sip.c: Forbidden - wrong password on authentication for REGISTER for '070101XXXXX' to 'chiefcall.com.tw'

A: ????????? IP ????????? 5 ???

Q: [??] ????????

WARNING[1271] chan\_sip.c: Retransmission timeout reached on transmission 2e4415d7-c2a5ca44@192.168.1.26 for seqno 101 (Critical Response) -- See <https://wiki.asterisk.org/wiki/display/AST/SIP+Retransmissions>  
Packet timed out after 44019ms with no response

A: ?????? Apply Changes ???