









Diagrams


OSI Model

OSI Model vs TCP/IP Model

OSI Model Layers	Function	TCP/IP Model Layers	PDUs	Hardware	Protocols
<p>7. Application</p> 	<p>Closest to the end user. This is the layer through which the application and the user communicate.</p> <p>For communication between web browsers and web server, application-specific protocols such as HTTP (Hyper Text Transfer Protocol) are utilized at this layer.</p>				
<p>6. Presentation</p> 	<p>This layer formats the data so that it may be understood by the receiving application. This layer can also encrypt data as it is sent and decrypt it as it is received, ensuring that only the intended recipient can read it.</p>	Application	Data	Gateways, Proxy Servers, Load Balancers	DNS, FTP, SNMP, DHCP, SSH, SMTP, POP3, LDAP, SMB, SSL, TLS, NetBIOS, HTTPS, HTTP, FTP, NFS, NTP, Telnet, IMAP, SSL, AFP, NetBIOS, RPC, SMB
<p>5. Session</p> 	<p>This layer controls host-to-host communication (sessions). It creates, manages, and destroys connections between a local application (such as your web browser) and a remote application (for example, youtube).</p>			PCs, mobile phones	
<p>4. Transport</p> 	<p>To ensure that no data is lost, the transport layer is employed for error handling and sequencing. This layer also provides host-to-host communication also known as end-to-end communication.</p>	Transport	Segment		TCP, UDP, RTP, SCTP, DCCP
<p>3. Network</p> 	<p>The Network layer connects end hosts on different networks (i.e. outside of your LAN). This layer handles logical addressing using IP addresses.</p>	Internet	Packet	Routers, Layer 3 Switches, Brouters	ICMP, IGMP, IP, IPsec, NAT
<p>2. Data Link</p> 	<p>This layer facilitates node-to-node communication and data transfer (for example, pc to switch, switch to router and router to router). The physical address (MAC Address) is appended to the data at this layer, this includes the source and destination MAC addresses.</p>		Frame	Switches, Bridges, WiFi Access Points	ARP, Ethernet, Token Ring, PPP, ATM, SLIP, Wi-Fi (IEEE 802.11), Frame relay, MAC, PPP, LLDP, L2TP, VLAN, VTP, Bluetooth, ISDN
<p>1. Physical</p> 	<p>The physical layer is the OSI model's bottom layer. It specifies the physical properties of a medium that is used to carry data between devices. For example, Voltage levels, maximum transmission distances, physical connectors, and so forth. Digital bits are transformed to electrical signals for wired connections and radio signals for wireless transmission at this layer.</p>	Network Access Or Link Layer	Bits	Network Cables (e.g. ethernet, fiber, copper) Hubs, Repeaters, Network Interface Cards (NICs)	

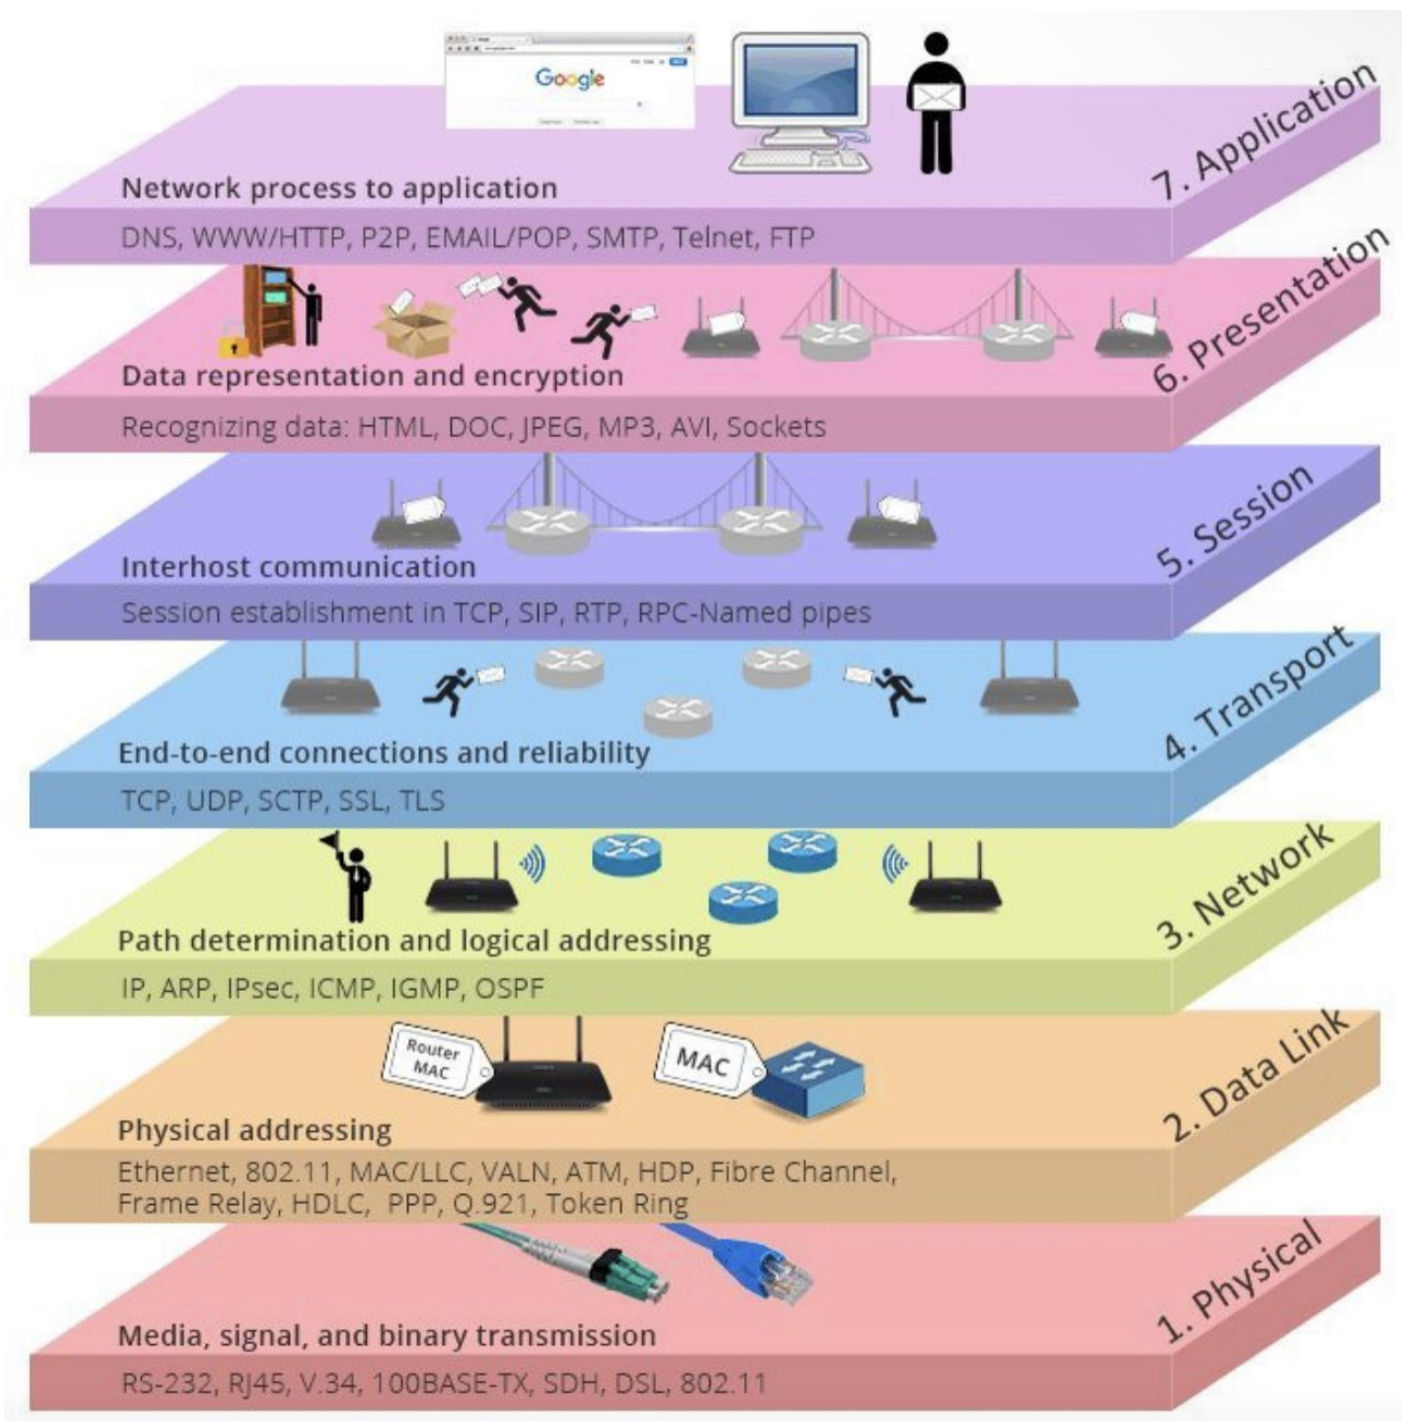

NETWORK COMMUNICATION PROTOCOLS MAP

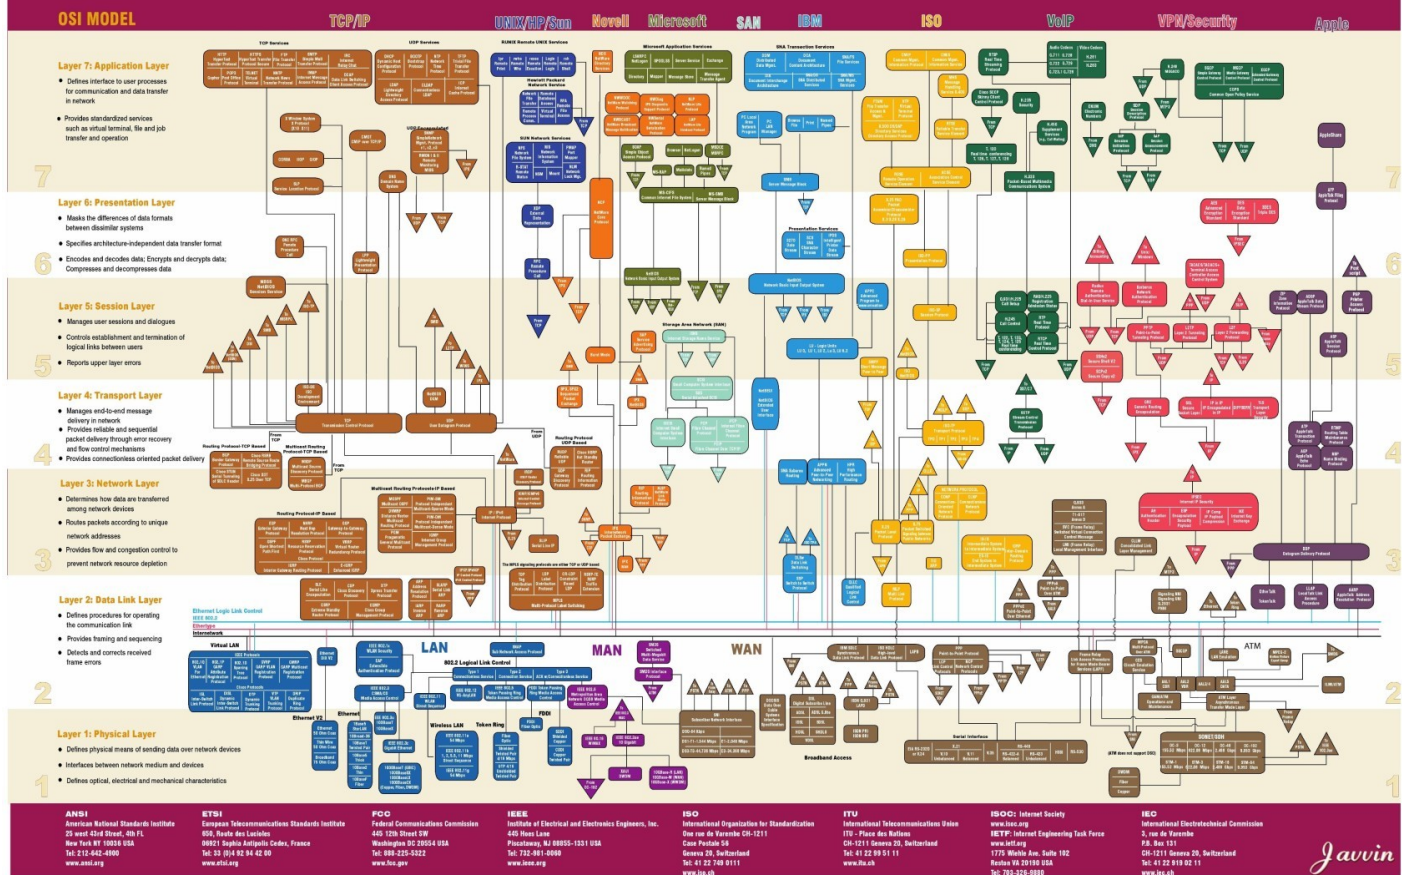

Power over Ethernet (PoE)



Power over Ethernet (PoE)



Created by @dan_nanni on Instagram



PoE Network Switch

Data + Power



PoE Device

PoE Injector



Non-PoE Network Switch

Data Only



Data + Power



PoE Device



PoE Network Switch

Data + Power



Power Cable

Data Only



Non-PoE Device



Non-PoE Network Switch

Data Only



Data + Power

PoE Splitter

Data Only



Non-PoE Device

MAC Address

MAC Addresss

6C:54:63:E2:31:76

Byte 1 Byte 2 Byte 3 Byte 4 Byte 5 Byte 6



OUI

NIC


Organizationally Unique Identifier

- First 3 bytes (24 bits)
- Assigned by IEEE to hardware manufacturers
- Identifies the manufacturer vendor

Network Interface Controller

- Last 3 bytes (24 bits)
- Assigned by manufacturer to each device
- Makes the complete address globally unique

First Byte Binary



7 6 5 4 3 2 1 0

U/L (Universal/Local) Bit

Bit 7 of first byte

- 0: Globally unique(factory)
- 1: Locally administered

I/G (Individual/Group) Bit

Bit 0 of first byte

- 0: Unicast(individual)
- 1: Multicast(group)

MAC Address Facts

- 48 bits = 281 trillion possible addresses
- Used in Ethernet, WiFi, Bluetooth
- Layer 2(Data Link) address in OSI model
- Also called Hardware or physical address
- FF:FF:FF:FF:FF:FF = Broadcast Address
- Format variations: 6C-83-75-B8-22-1A or 6C8375B8221A

sysxplore.com

Ethernet Cable Types



Ethernet LAN Cable Types



Created by Dan Nanni at study-notes.org



CAT 1

1 Mbps

1 MHz

Not Ethernet



CAT 2

4 Mbps

4 MHz

Not Ethernet



CAT 3

10 Mbps

16 MHz

100m



CAT 4

16 Mbps

20 MHz

100m



CAT 5

100 Mbps

100 MHz

100m



CAT 5e

1 Gbps

100 MHz

100m



CAT 6

1 Gbps

250 MHz

100m



CAT 6A

10 Gbps

500 MHz

100m



CAT 7

10 Gbps

600 MHz

100m



CAT 7A

10 Gbps

1000 MHz

100m



CAT 8.1

25 Gbps

2000 MHz

30m



CAT 8.2

40 Gbps

2000 MHz

30m

(10Gbps ≤55m)

Revision #6

Created 2023-12-03 12:29:23 CST by A-Lang (Admin)

Updated 2025-04-08 19:50:15 CST by A-Lang (Admin)