

# Asterisk & FreePBX

Asterisk ?????????????????? ?????? ??? Asterisk ? Digium  
??????-????1999????????????????????????????????? Asterisk  
????????????????????????IP????? FreePBX is a web-based open-source graphical user interface (GUI) that manages Asterisk, a voice over IP and telephony server.

- Installation
  - [Install FreePBX 15 with Asterisk 16 on Debian 10](#)
  - [Install FreePBX 15 with Docker](#)
  - [Incredible PBX](#)
- [Learning](#)
- [Q & A](#)
- [A2B ? FreePBX ???](#)
- [A2Billing](#)
- [Voice Mail Transcription](#)
- [Soft Phone](#)
- [OpenSIPS](#)
- [FreePBX](#)
  - [fwconsole](#)
  - [Post-Installation](#)
  - [OSS Endpoint Manager](#)

# Installation

Install Asterisk and FreePBX

## Installation

# Install FreePBX 15 with Asterisk 16 on Debian 10

## Install Asterisk 16

### Step 1: Update system

```
sudo apt update && sudo apt upgrade  
sudo reboot
```

### Step 2: Install Asterisk 16 LTS dependencies

```
sudo apt install git curl wget libnewt-dev libssl-dev libncurses5-dev subversion libssqlite3-dev build-essential  
libjansson-dev libxml2-dev uuid-dev
```

### Step 3: Download Asterisk 16 LTS tarball

```
cd /usr/src/  
sudo curl -O http://downloads.asterisk.org/pub/telephony/asterisk/asterisk-16-current.tar.gz  
  
sudo tar xvf asterisk-16-current.tar.gz  
cd asterisk-16*/  
  
# download the mp3 decoder library into the source tree  
sudo contrib/scripts/get_mp3_source.sh  
  
# Ensure all dependencies are resolved  
sudo contrib/scripts/install_prereq install
```

### Step 4: Build and Install Asterisk 16

```
sudo ./configure  
sudo make menuselect
```

- Add-ons: chan\_ooh323, format\_mp3
- Core Sound Packages: CORE-SOUNDS-EN-\*
- Music On Hold File Packages: MOH-OPSOUND-\*
- Extra Sound Packages: EXTRA-SOUNDS-EN-\*
- Applications: app\_macro

```
sudo make
sudo make install
sudo make progdocs
sudo make samples
sudo make config
sudo ldconfig
```

## Create Asterisk User

```
sudo groupadd asterisk
sudo useradd -r -d /var/lib/asterisk -g asterisk asterisk
sudo usermod -aG audio,dialout asterisk
sudo chown -R asterisk.asterisk /etc/asterisk
sudo chown -R asterisk.asterisk /var/{lib,log,spool}/asterisk
sudo chown -R asterisk.asterisk /usr/lib/asterisk
```

## Set Asterisk default user to asterisk

```
$ sudo vim /etc/default/asterisk
AST_USER="asterisk"
AST_GROUP="asterisk"

$ sudo vim /etc/asterisk/asterisk.conf
runuser = asterisk ; The user to run as.
rungroup = asterisk ; The group to run as.
```

## Restart asterisk service

```
sudo systemctl restart asterisk

# Enable asterisk service to start on system boot
sudo systemctl enable asterisk

# Test to see if you can connect to Asterisk CLI
sudo asterisk -rvv
```

# Install FreePBX 15

## Step 1: Install MariaDB Database server

```
sudo apt update  
sudo apt install mariadb-server mariadb-client  
  
# Initial DB setup and set root's password for DB  
sudo /usr/bin/mysql_secure_installation
```

## Step 2: Installing Node.js 10 LTS

```
sudo apt install curl dirmngr apt-transport-https lsb-release ca-certificates  
curl -sL https://deb.nodesource.com/setup_10.x | sudo bash  
sudo apt update  
sudo apt install gcc g++ make  
sudo apt install nodejs
```

## Step 3: Install and configure Apache Web Server

```
sudo apt install apache2  
  
# change Apache user to asterisk and turn on AllowOverride option  
sudo cp /etc/apache2/apache2.conf /etc/apache2/apache2.conf_orig  
sudo sed -i 's/^User|Group|.*$/1 asterisk/' /etc/apache2/apache2.conf  
sudo sed -i 's/AllowOverride None/AllowOverride All/' /etc/apache2/apache2.conf  
  
# Remove default index.html page  
sudo rm -f /var/www/html/index.html
```

## Step 4: Install PHP and required extensions

```
sudo apt install wget php php-pear php-cgi php-common php-curl php-mbstring php-gd php-mysql \  
php-gettext php-bcmath php-zip php-xml php-imap php-json php-snmp php-fpm libapache2-mod-php
```

### Change php maximum file upload size

```
sudo sed -i 's/^upload_max_filesize = \).*120M/' /etc/php/7.3/apache2/php.ini  
sudo sed -i 's/^upload_max_filesize = \).*120M/' /etc/php/7.3/cli/php.ini
```

## Step 5: Install FreePBX 15

```
sudo apt install wget  
cd /usr/src  
wget http://mirror.freepbx.org/modules/packages/freepbx/freepbx-15.0-latest.tgz  
  
tar xfz freepbx-15.0-latest.tgz  
rm -f freepbx-15.0-latest.tgz  
  
cd freepbx  
sudo ./start_asterisk start  
sudo ./install -n --dbuser root --dbpass "yourpassword"  
  
# Enable Apache Rewrite engine  
sudo a2enmod rewrite  
sudo systemctl restart apache2
```

## Step 6: Access FreePBX 15 Web Interface

Create the first admin account.

### Q & A

**Q: Online modules are not available.**

Error:

Warning: Error retrieving updates from online repository(s)  
(<https://mirror.freepbx.org> 35). Online modules are not available.

**A: Change the DNS to 8.8.8.8**

```
vi /etc/resolv.conf  
  
nameserver 8.8.8.8  
#nameserver 67.207.67.3  
#nameserver 67.207.67.2
```

# Reference

- [Install Asterisk 16 with FreePBX 15 on Ubuntu 20.04/18.04/16.04 & Debian 9](#)
- [Install Asterisk 16 LTS on Ubuntu 20.04/18.04/16.04 & Debian 10/9](#)
- [How To Install FreePBX 15 on Ubuntu 20.04/18.04/16.04 & Debian 10/9](#)
- [Installing FreePBX 15 on Debian 9.6](#)

Installation

# Install FreePBX 15 with Docker

## Reference

- <https://github.com/tiredofit/docker-freepbx#introduction>

Installation

# Incredible PBX

## Post-Installation

### Incredible PBX 2027 with Debian 11

Reset the hostname and password:

```
# Set the hostname
hostnamectl set-hostname <your-FQDN-name>

# Set the password
passwd      # for Root
admin-pw-change  # for FreePBX
apache-pw-change  # for Reminders and AsteriDex
```

Set Gmail as an SMTP Smarhost:

Create an App password for your Gmail account:

<https://support.google.com/accounts/answer/185833?hl=en>

```
/root/enable-gmail-smarthost-for-sendmail
```

Stop Webmin

```
systemctl stop webmin
systemctl disable webmin
```

# Learning

## Official URLs

### Community

- Asterisk: <https://community.asterisk.org/>
- FreePBX: <https://community.freepbx.org/>

### Github

- Asterisk: <https://github.com/asterisk>
- FreePBX: <https://github.com/freepbx>

## Speech Recognition (Speech to Text)

### Vosk-API

- Vosk speech recognition modules for Asterisk
- <https://alphacepheli.com/vosk/integrations>
- Offline Speech to Text for Desktop Linux

## Kamailio

- [Handling SIP Flood Attacks Using Kamailio](#)

## Secure SIP Server

- [APIBAN](#)
  - [Apiban Clients](#)
  - [Block unwanted SIP traffic efficiently](#)

## SIP Monitoring

- [sipexer - Modern and flexible SIP cli tool](#)

## Auto Provisioning

- OSS End Point Manager - PBX GUI - Documentation ([freeswitch.org](http://freeswitch.org))
- <https://www.voip-info.org/forum/threads/oss-epm-for-freeswitch-16-ipbx-2027.26880/>

## WebRTC

- [InnovateAsterisk/Browser-Phone](#)
- [Video] [WebRTC Browser Phone with Asterisk & Raspberry Pi](#)

## Billing

- [MagnusBilling](#)

## HA with DRBD



- [VitalPBX High Availability](#)

# Q & A

## CDR Reports ??????

?? MySQL ???

```
# MySQL Credentials  
cat /etc/freepbx.conf  
  
# Check the mysql  
mysql -u freepbxuser -p asteriskcdrdb -e 'SELECT * FROM cdr ORDER BY calldate DESC LIMIT 4'
```

?? asterisk module

```
asterisk -rx "module show like odbc"
```

Module	Description	Use Count	Status	Support Level
cdr_adaptive_odbc.so	Adaptive ODBC CDR backend	0	Running	core
cdr_odbc.so	ODBC CDR Backend	0	Running	extended
cel_odbc.so	ODBC CEL backend	0	Running	core
func_odbc.so	ODBC lookups	0	Running	core
res_config_odbc.so	Realtime ODBC configuration	0	Running	core
res_odbc.so	ODBC resource	6	Running	core
res_odbc_transaction.so	ODBC transaction resource	1	Running	core

???????????

```
fwconsole stop  
fwconsole start
```

```
[2022-06-03 10:38:42] WARNING[32144] res_odbc.c: res_odbc: Error  
SQLConnect=-1 errno=0 [unixODBC][Driver Manager]Can't open lib  
'/usr/lib/x86_64-linux-gnu/odbc/libmaodbc.so' : file not f
```

Solution:

```
#> locate libmaodbc.so  
/usr/lib/i386-linux-gnu/odbc/libmaodbc.so  
  
#> cp /etc/odbcinst.ini /etc/odbcinst.ini.orig  
#> vi /etc/odbcinst.ini  
  
# Change this line  
Driver = /usr/lib/x86_64-linux-gnu/odbc/libmaodbc.so
```

?????????????

```
fwconsole stop  
fwconsole start
```

## Can't send 10 type frames with SIP write

Frame type '10' is comfort noise (aka CNG) which Asterisk does not support.

However as of 13.18.0 this message will be silenced so you won't see it anymore.

You can ignore it or disable CNG on all of your endpoints and ask the telecom providers as well to disable the CNG on your trunks.

# A2B ? FreePBX ???

## A2B ?? Outbound Trunk ?

Call > FreePBX > A2B > SIP Carrier

? FreePBX ???????  
??????????

```
username=51521171
fromuser=51521171
type=friend
secret=1234567
host=incoming.future-nine.com
insecure=port,invite
nat=yes
qualify=yes
context=from-trunk
allow=ulaw,g729,g726
trustrpid=yes
sendrpid=yes
canreinvite=no
```

## FreePBX ?? Outbound Trunk ?

Call > A2B > FreePBX > SIP Carrier

? FreePBX ?)

1. ?? SIP extension: 9001

? A2B PBX)

1. ?? SIP Trunk: freepbx

```
[freepbx]
username=9001
type=peer
```

```
secret=<ext-secret>
insecure=very
host=<freepbx-ip-addr>
fromuser=9001
qualify=yes
```

## 2. ?? SIP Register String (**for incoming call only**)

```
9001:<ext-secret>@<freepbx-ip-addr>/from_freepbx
```

NOTE: ??????? SIP number ??????(/from\_freepbx)???????? SIP number 199 ??

## 3. ?? Outbound Route

# A2Billing

## URLs

- Home: <http://www.asterisk2billing.org/>
- Github: <https://github.com/Star2Billing/a2billing/>

## Alternative to A2Billing

- [MagnusBilling](#)
  - Github: <https://github.com/magnussolution/magnusbilling7>
- [ASTPP](#) (based on FreeSWITCH)
  - Github: <https://github.com/iNextrix/ASTPP>

# Voice Mail Transcription

## IBM Watson STT

### Creating IBM Watson Credentials

1. [Login to IBM Cloud using your new credentials.](#)
2. Once logged in, choose *IBM Cloud* from the Title Bar to display your Dashboard.
3. Choose *Create Resource*.
4. Click *Speech to Text* from the AI Section.
5. Name your STT service, choose the desired region, and choose Default resource group.
6. Select a *Pricing Plan*:
  - LITE provides 500 minutes/month free. Plan is deleted after 30 days of inactivity.
  - STANDARD is 2¢/minute with no free minutes.
7. When *Speech to Text* dialog opens, copy your *API Key* and *URL*.
8. Logout by clicking on image icon in upper right corner of dialog window.

### Installing STT Engine

1. Unpack the file

```
wget http://incrediblepbx.com/sendmailbm-13.tar.gz  
tar zxvf sendmailbm-13.tar.gz  
cp sendmailmp3.ibm /usr/local/sbin/sendmailmp3  
chmod 0755 /usr/local/sbin/sendmailmp3
```

2. Edit `sendmailmp3.ibm` and insert your IBM STT API\_KEY and URL. Save file.
3. Edit `bluemix-test` and insert your IBM STT API\_KEY and URL. Save the file.
4. Copy the updated `sendmailmp3.ibm` file to `sendmailmp3`:

```
cp sendmailmp3.ibm /usr/local/sbin/sendmailmp3  
chmod 0755 /usr/local/sbin/sendmailmp3
```

5. Test your Bluemix STT setup: `bluemix-test`

Result should be: *we are now transferring you out of the company directory...*

# FreePBX Setup

Settings > Voicemail Admin > Settings > Email Config > Mail Command:  
/usr/local/sbin/sendmailmp3

Set up voicemail for an extension and include your email address.

## Tutorials

- [Free IBM Voicemail Transcription with Incredible PBX 2020](#)
- [IBM's Speech Recognition Engine Comes to Asterisk](#)
- [Free Asterisk Voicemail Transcription with IBM Watson STT](#)
- [Creating IBM Watson Credentials](#)
- [Release notes for Speech to Text for IBM Cloud](#)
- [Getting started with Speech to Text](#)
- [Github: lgaetz/sendmail-bluemix](#)
- [Github: jtsage/sendmail.asterisk](#)

# Google STT

## Tutorials

- [Speech to text using Google Cloud \(voicemails to text\)](#)
- [FreePBX-VM-Transcription](#)

# Soft Phone

## Open Source/Freeware

- [Zoiper](#) - Branding for your business, Freeware, Support mobile and desktop (Linux/Windows/macOS)
- [Linphone](#) - Open Source, Support mobile and desktop (Linux/Windows/macOS)
- [MicroSIP](#) - Open Source, based on PJSIP for Windows OS
- [PhonerLite](#) - Freeware, For Windows OS

# OpenSIPS

## Installation on Debian 10

- [OpenSIPS v3 with GUI on Debian v10 MariaDB Apache install guide](#)
- [Quick Start to OpenSIPS Training 3.2](#)

## OpenSIPS 3.3

```
apt install gnupg2
apt-key adv --keyserver keyserver.ubuntu.com --recv-keys 049AD65B

# For Debian 10
echo "deb https://apt.opensips.org buster 3.3-releases" >/etc/apt/sources.list.d/opensips.list
echo "deb https://apt.opensips.org buster cli-nightly" >/etc/apt/sources.list.d/opensips-cli.list
# For Ubuntu 20
echo "deb https://apt.opensips.org focal 3.3-releases" >/etc/apt/sources.list.d/opensips.list
echo "deb https://apt.opensips.org focal cli-nightly" >/etc/apt/sources.list.d/opensips-cli.list

apt update
apt install opensips
apt install opensips-cli

# Install all other modules
apt install opensips-*

# Start opensips and check the status
systemctl start opensips
systemctl status opensips
```

## OpenSIPS Database Support (MySQL)

```
# Install MySQL Server (MariaDB on Debian 10)
apt install mariadb-server

# Create the database opensips using the OpenSIPS command line interface
```

```
opensips-cli -x database create opensips

# Verify if the tables were created
mysql opensips -e "show tables"

# Set the root's password for MariaDB and complete a few secure steps.
MariaDB> alter user 'root'@'localhost' identified by 'newpassword';
MariaDB> flush privileges;
MariaDB> exit
```

## OpenSIPS Control Panel 9.3.3

- [OpenSIPS Control Panel version class 9 \(9.3.2, 9.3.3\) documentation](#)

```
# Install Apache, PHP and other dependencies
apt-get install apache2 libapache2-mod-php php-curl php php-mysql php-gd php-pear php-cli php-apcu git

# Download the OCP 9.3.3
git clone -b 9.3.3 https://github.com/OpenSIPS/opensips-cp.git /var/www/opensips-cp
```

### Configure Apache

```
# Remove the default configuration
rm /etc/apache2/sites-enabled/000-default.conf
```

Edit: /etc/apache2/sites-enabled/opensips.conf

```
<VirtualHost *:80>
    <Directory /var/www/opensips-cp/web>
        Options Indexes FollowSymLinks MultiViews
        AllowOverride None
        Require all granted
    </Directory>

    <Directory /var/www/opensips-cp>
        Options Indexes FollowSymLinks MultiViews
        AllowOverride None
        Require all denied
    </Directory>
```

```
Alias /cp /var/www/opensips-cp/web

<DirectoryMatch "/var/www/opensips-cp/web/tools/*/*/(template|custom_actions|lib)"/>
    Require all denied
</DirectoryMatch>

ErrorLog ${APACHE_LOG_DIR}/error.log
CustomLog ${APACHE_LOG_DIR}/access.log combined

</VirtualHost>
```

## Set the permissions of directories

```
chown -R www-data:www-data /var/www/opensips-cp/
```

## Creating the OCP tables

```
# This will create the OCP specific tables into the opensips database and add a first access user,
# the admin user with the opensips password.
mysql -uroot -p opensips < /var/www/opensips-cp/config/db_schema.mysql
```

## set Cron jobs

```
cp /var/www/opensips-cp/config/tools/system/smonitor/opensips_stats_cron /etc/cron.d
sed -i 's/\var\www\html\opensips-cp\var\www\opensips-cp/g' /etc/cron.d/opensips_stats_cron
```

## Restart Apache

```
systemctl restart apache2
```

Visit the OCP Web site: <http://server-ip-address/cp> , admin / opensips

## RTPProxy

```
apt install build-essential
apt install libucl-dev
cd /usr/src
git clone -b master https://github.com/sippy/rtpproxy.git
git -C rtpproxy submodule update --init --recursive
cd rtpproxy
./configure
```

```
make clean all
```

```
make install
```

## Configure the systemd

Edit: /etc/systemd/system/rtpproxy.service

### [Unit]

```
Description=RTProxy media server
```

```
After=network.target
```

```
Requires=network.target
```

### [Service]

```
Type=simple
```

```
PIDFile=/var/run/rtpproxy/rtpproxy.pid
```

```
Environment='OPTIONS= -l 172.16.0.67 -A 154.19.187.227 -m 10000 -M 20000 -d INFO:LOG_LOCAL5'
```

```
Restart=always
```

```
RestartSec=5
```

```
ExecStartPre=-/bin/mkdir /var/run/rtpproxy
```

```
ExecStartPre=-/bin/chown opensips:opensips /var/run/rtpproxy
```

```
ExecStart=/usr/local/bin/rtpproxy -p /var/run/rtpproxy/rtpproxy.pid -s unix:/var/run/rtpproxy/rtpproxy.sock \
-u opensips:opensips $OPTIONS
```

```
ExecStop=/usr/bin/pkill -F /var/run/rtpproxy/rtpproxy.pid
```

```
ExecStopPost=-/bin/rm -R /var/run/rtpproxy
```

```
StandardOutput=syslog
```

```
StandardError=syslog
```

```
SyslogIdentifier=rtpproxy
```

```
SyslogFacility=local5
```

```
TimeoutStartSec=10
```

```
TimeoutStopSec=10
```

### [Install]

```
WantedBy=multi-user.target
```

## Start the service

```
systemctl daemon-reload  
systemctl start rtpproxy  
systemctl enable rtpproxy
```

# Configuration

## OpenSIPS

### Generate config file

```
# Install the package required  
apt install m4  
  
# -> Residential Script  
# --> Configure Residential Script  
# ---> Select all options except for TLS, VM_DIVERSION, PRESENCE  
/usr/sbin/osipsconfig  
  
mv /etc/opensips/opensips.cfg /etc/opensips/opensips.cfg.orig  
mv /etc/opensips/opensips_residential_2023-3-19_6:6:6.cfg /etc/opensips/opensips.cfg  
chmod 0644 /etc/opensips/opensips.cfg  
  
# Restart OpenSIPS  
systemctl restart opensips
```

### opensips.cfg for server behind the firewall

```
/* For AWS and OpenStack Environment */  
/* WAN IP: 123.123.123.123 */  
/* LAN IP: 172.16.0.67 */  
advertised_address="123.123.123.123"  
alias="123.123.123.123"  
  
socket=udp:172.16.0.67:5060  
socket=tcp:172.16.0.67:5060
```

## opensips.cfg for RTPProxy

```
### RTPProxy module ###
loadmodule "rtpproxy.so"
## Fixed for ERROR:rtpproxy:send_rtpp_command: proxy <udp:localhost:7890> does not respond, disable it
#modparam("rtpproxy", "rtpproxy_sock", "udp:localhost:7890")
modparam("rtpproxy", "rtpproxy_sock", "unix:/var/run/rtpproxy/rtpproxy.sock")
```

## opensips.cfg for dispatcher

```
### Dispatcher modules ###
loadmodule "dispatcher.so"
modparam("dispatcher", "db_url", "mysql://opensips:opensipsrw@localhost/opensips")
modparam("dispatcher", "dst_avp", "$avp(271)")
modparam("dispatcher", "attrs_avp", "$avp(272)")
modparam("dispatcher", "grp_avp", "$avp(273)")
modparam("dispatcher", "cnt_avp", "$avp(274)")
modparam("dispatcher", "hash_pvar", "$avp(273)")
modparam("dispatcher", "ds_ping_method", "OPTIONS")
modparam("dispatcher", "ds_ping_from", "sip:sipcheck@outbound_IP:5060")
modparam("dispatcher", "ds_ping_interval", 10)
modparam("dispatcher", "ds_probing_threshold", 3)
modparam("dispatcher", "ds_probing_mode", 1)
modparam("dispatcher", "options_reply_codes", "501,403,404,400,200")
```

## OpenSIPS Control Panel (OCP)

OCP ??????????

?: config/modules.inc.php

???????

?: config/db.inc.php

## Log file

Edit: /etc/rsyslog.d/opensips.conf

```
local0.*          -/var/log/opensips.log
```

## Restart rsyslog

```
touch /var/log/opensips.log  
systemctl restart rsyslog
```

## OpenSIPS CLI

```
# opensips-cli -x mi version  
{  
    "Server": "OpenSIPS (3.1.14 (x86_64/linux))"  
}
```

## FAQ

### OCP ? dispatcher ??????

Solution: ?? dispatcher ? mi\_http ?????????????????? OCP ? MI Commands ?? `ds_list` ????????????????????

## Links

- <https://opensips.org/>
- <https://www.rtpproxy.org/>
- Quick Start to OpenSIPS Training 3.2
- [opensips ?? 1/2](#)

### Dispatcher

- [OpenSIPS + FreeSWITCH ??????](#)
- [OpenSIPS????-dispatcher?????-?????????????](#)

### CGRateS

- [Installation](#)
- [CGRateS Usage](#)
- <https://fossies.org/linux/opensips/modules/cgrates/README>
- <https://nickvsnetworking.com/category/voip/cgrates/>



# FreePBX

# fwconsole

## Tutorials

- [CLI Commands](#)

## Help

```
fwconsole help

# lists all commands
php /usr/sbin/fwconsole list
```

## Service Start/Stop

```
# Start Asterisk and run other needed FreePBX commands
fwconsole start

# Stop Asterisk and run other needed FreePBX commands
fwconsole stop
```

## Module Admin

```
# Check Online Repository
fwconsole ma listonline

# Install a module
fwconsole ma download ivr
fwconsole ma install ivr

# Installing specific module versions with multiple modules
fwconsole ma install foomodule:15.1.3 barmodule:15.0.9

# Upgrade all modules
fwconsole ma listonline | grep "upgrade"
fwconsole ma upgradeall
```

```
# Apply the settings changed  
fwconsole reload
```

## Database

????? asterisk (??? /etc/freepbx.conf ??????)

```
fwconsole m
```

# Post-Installation

## Set root's password for MySQL

```
mysql_secure_installation
```

## Log File Rotation

If this is not done the log files will keep growing indefinitely.  
Edit /etc/logrotate.d/asterisk

```
/var/spool/mail/asterisk
/var/log/asterisk/*log
/var/log/asterisk/full
/var/log/asterisk/dtmf
/var/log/asterisk/freepbx_dbug
/var/log/asterisk/fail2ban {
    weekly
    missingok
    rotate 4
    #compress
    notifempty
    sharedscripts
    create 0640 asterisk asterisk
    postrotate
        /usr/sbin/asterisk -rx 'logger reload' > /dev/null 2> /dev/null || true
    endscript
    su root root
}
```

## TFTP

If you plan to use hardware SIP phones you will probably want to set up TFTP.

```
yum -y install tftp-server
nano /etc/xinetd.d/tftp
```

```
change server_args = -s /var/lib/tftpboot  
to server_args = -s /tftpboot  
change disable=yes  
to disable=no
```

```
mkdir /tftpboot  
chmod 777 /tftpboot  
systemctl restart xinetd  
firewall-cmd --permanent --zone=public --add-port=69/udp  
firewall-cmd --reload
```

## MPG123

This is used in combination with sox to convert uploaded mp3 files to Asterisk compatible wav files.

```
cd /usr/src  
wget http://ufpr.dl.sourceforge.net/project/mpg123/mpg123/1.22.4/mpg123-1.22.4.tar.bz2  
tar -xjvf mpg123*  
cd mpg123*/  
../configure --prefix=/usr --libdir=/usr/lib64 && make && make install && ldconfig
```

## Digum addons

To register digium® licenses.

```
cd /usr/src  
wget http://downloads.digium.com/pub/register/linux/register  
chmod +x register  
.register
```

To install the individual addons refer to the README files and ignore the register instructions.

- [http://downloads.digium.com/pub/telephony/codec\\_g729/README](http://downloads.digium.com/pub/telephony/codec_g729/README)
- [http://downloads.digium.com/pub/telephony/res\\_digium\\_phone/README](http://downloads.digium.com/pub/telephony/res_digium_phone/README)
- <http://downloads.digium.com/pub/telephony/fax/README>
- <http://downloads.digium.com/pub/telephony/hpec/README>

## Password protect http access

A simple way to block scanners looking for exploits on apache web servers.

```
mkdir -p /usr/local/apache/passwd  
htpasswd -c /usr/local/apache/passwd/wwwpasswd someusername  
htpasswd -c /usr/local/apache/passwd/wwwpasswd someotherusername  
nano /var/www/html/.htaccess
```

```
# .htaccess files require AllowOverride On in /etc/httpd/conf/httpd.conf  
AuthType Basic  
AuthName "Restricted Access"  
AuthUserFile /usr/local/apache/passwd/wwwpasswd  
Require valid-user
```

Alternatively, the above .htaccess config can be added to /etc/httpd/conf/httpd.conf or as a separate file in /etc/httpd/conf.d/ as follows.

```
<Directory /var/www/html>  
AuthType Basic  
AuthName "Restricted Area"  
AuthUserFile /usr/local/apache/passwd/wwwpasswd  
Require valid-user  
</Directory>
```

## Whitelist protect http access

If http access is only required from certain IP addresses.

NOTE: Apache 2.4 ????????

Edit /etc/httpd/conf.d/whitelist.conf

```
<Location />  
<RequireAny>  
## Uncomment the following line to disable the whitelist  
#Require all granted  
Require ip x.x.x.x  
Require ip x.x.x.x x.x.x.x x.x.x.x  
Require ip x.x  
Require ip x.x.x.0/255.255.255.0  
Require host somedomain.com  
#  
## See http://httpd.apache.org/docs/2.4/mod/mod_authz_host.html for more examples  
#
```

```
</RequireAny>  
</Location>
```

?? Apache ??  
NOTE????????? AllowOverride All ??  
.htaccess?

```
order deny,allow  
deny from all  
# Alang's IPs  
allow from 123.123.123.1  
allow from 111.222.222.2  
allow from 192.168.99.
```

## G.729 Codec

- <https://www.asterisk.org/products/add-ons/g729-codec/>
- <http://asterisk.hosting.lv/>

# OSS Endpoint Manager

## Links

- Github: <https://github.com/billsimon/endpointman>
- Doc: <https://wiki.freepbx.org/display/FPG/OSS+End+Point+Manager>
- [EPM-Supported Devices](#)
- [Introducing OSS Endpoint Manager for FreePBX 16 & Incredible PBX 2027 – Nerd Vittles](#)

## Installation

Incredible PBX 2027

```
cd /var/www/html/admin/modules
wget http://incrediblepbx.com/ossepm16.tgz
tar zxvf ossepm16.tgz
rm -f ossepm16.tgz
rm -f /tmp/*
fwconsole ma install endpointman
fwconsole reload
```

## Settings

Module	Version	Track	Publisher	License	Status
► Asterisk API	15.0.20	Stable	Sangoma Technologies	GPLv2+	Enabled
► Asterisk IAX Settings	15.0.8	Stable	Sangoma Technologies	AGPLv3	Enabled
► Asterisk REST Interface Users	15.0.3.20	Stable	Sangoma Technologies	GPLv3+	Enabled
► Asterisk SIP Settings	15.0.11	Stable	Sangoma Technologies	AGPLv3+	Enabled
► Camp-On	13.0.4.1	Stable	Sangoma Technologies	GPLv3+	Enabled
► Extension Settings	13.0.4	Stable	Sangoma Technologies	GPLv3+	Enabled
► Fax Configuration	15.0.13	Stable	Sangoma Technologies	GPLv3+	Disabled
► Filestore	15.0.7	Stable	Sangoma Technologies	AGPLv3	Enabled
► IncrediblePBX	13.0.7	Stable	Clearly IP Inc	AGPLv3+	Enabled
► Music on Hold	15.0.22	Stable	Sangoma Technologies	GPLv3+	Enabled
▼ OSS PBX End Point Manager	16.0.0.1	Stable		GPLv3+	Enabled

Info License: GPLv3+

Changelog

Description: OSS PBX End Point Manager is the free supported PBX Endpoint Manager for FreePBX. It is maintained by Sangoma Technologies, Inc. Pull Requests can be made to either of <https://github.com/provisioner/Provisioner> or [https://github.com/SangomaTechnologies/OSS\\_PBX\\_End\\_Point\\_Manager](https://github.com/SangomaTechnologies/OSS_PBX_End_Point_Manager).

More info: Get help for OSS PBX End Point Manager

Track: Stable

Action: No Action Disable Uninstall Remove

► PHPAGI Config      2.11.0.2      Stable      Sangoma Technologies      GPLv3+      Enabled

# Configuration

## Package Server


FreePBX GUI > Settings > OSS Endpoint Manager > Settings

- Package Server:

FreePBX GUI > Settings > OSS Endpoint Manager > Package Manager

- Click the Check for Update

?????????????????????????

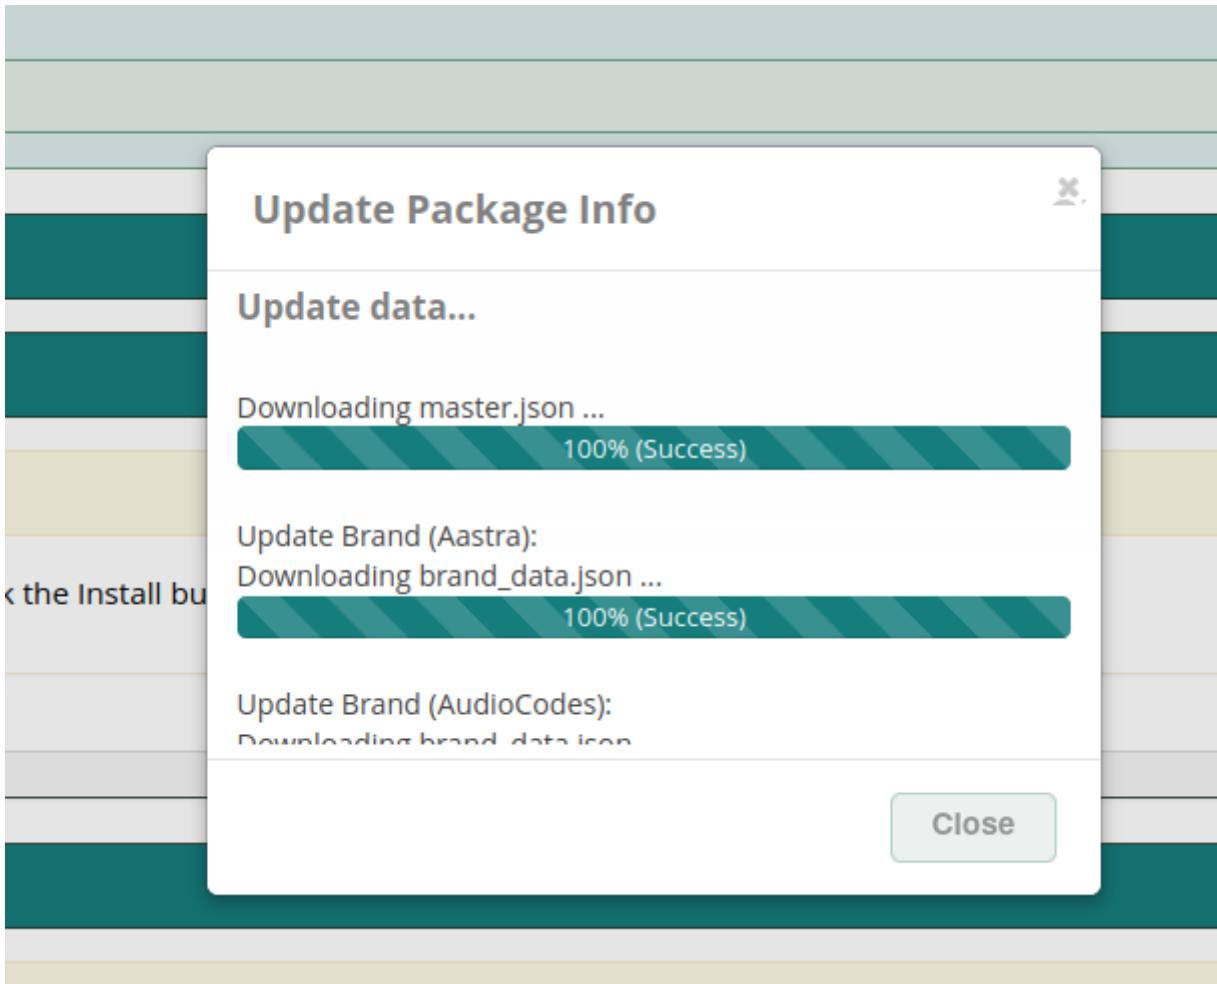

## Additional brands (Grandstream & Yealink V80)

- Download: [SourceForge](#)

FreePBX GUI > Settings > OSS Endpoint Manager > Settings > Package Import/Export

- Brand Package: `grandstream.tgz` `yealinkv80.tgz`



## IP & NTP & Type

FreePBX GUI > Settings > OSS Endpoint Manager > Settings

- IP address of phone server: <server-ip-addr>
- Internal IP address of phone server: <server-ip-addr>
- Configuration Type: Web (HTTP)
- Time Zone: Asia/Taipei
- Time Server: tw.pool.ntp.org

?????? Settings ?????? Template Editor?????????? Extension Mapping??? Selected Phone Options ?? Global Phone Options??? Rebuild?????????????????????

## Extension Provisioning

### Add Device: Linksys PAP2T

FreePBX GUI > Settings > OSS Endpoint Manager > Package Manager

- Cisco/Linksys - PAP2T : Enable

### Create Template: my-pap2t

???????????? PAP2T ?????????????????? my-pap2t?

????? template ????????????? Extension Mapping ??????????????  
Save???????????????

- Template Name: my-pap2t
- Product Select: Linksys/Cisco
- Clone Template From: PAP2T

Edit the template: my-pap2t

- Profile Resync: 3600 (?????? `Resync_Periodic` ??????????????????????)
- Enable Webserver: Yes
- Enable Webserver Admin: Yes
- Administrator Password: <set-your-password>
- User Password: <set-your-password>

????? template ???? Edit Global Setting Overrides???????? template????? ??  
template???? template ????????

???template ??????? (`spa$mac.xml`) ?????????????????????? HTTP ??????????  
`http://freepbx-ip-addr/provisioning/p.php/spaxxxxxxx.xml?xxxxxxxx` ??? MAC address  
???????????????????????

## Extension Mapping

- MAC Address: <pap2t-mac-addr>
- IPEI: <blank>
- Brand: Cisco/Linksys
- Model: PAP2T
- Line: 1
- Extension Number: <select-your-extension>
- Template: my-pap2t

## PAP2T ??

?? PAP2T ???? (advanced view) > Provisioning

- Provision Enable: yes
- Profile Rule: `http://<freepbx-ip-addr>/provisioning/p.php/spa$MA.xml`

???????????????

## Provisioning Template Files

## SPA-3102/PAP2T

File: [spa\\$mac.xml](#)

????????? [/var/www/html/admin/modules/\\_ep\\_phone\\_modules/endpoint/cisco/linksysata/](/var/www/html/admin/modules/_ep_phone_modules/endpoint/cisco/linksysata/)

?????

1. ????????????
2. ?? LAN ?? DHCP?SPA3102 ????
3. ???????????????????? tftp ???